



ROW-FIX






Adjustable ridging point



Optional: crop protection shaft

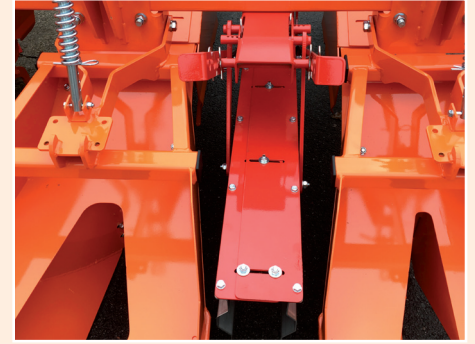





Optional: crop protection shaft

Highlights ROW-FIX

- Cultivation and weed control with a single machine
- Can be used for various crops
- Available for 2 to 8 rows
- Adjustable tilling units for use with crops of differing row distances
- Shear bolt protection on every tilling unit
- As the tilling units are driven individually, there is clearance between the tilling elements, both laterally and upwards. This makes it possible to till in crops with high leaf content
- The tilling elements are fitted with 8 hooks as standard. Optional narrow elements are available with 4 hooks so that tilling can take place without affecting the crop's root system
- Crop protection shaft, adjustable from 95 to 170 mm (optional)
- Available with widia hooks (optional)
- Gearboxes of 100 hp and 300 hp

Dimensions and weights

Type	 min.			 kg
ROW-FIX 1500	65pk/48kW	2x75cm/2x30"	1000	800
ROW-FIX 1800	70pk/52kW	2x90cm/2x36"	1000	850
ROW-FIX 3000	100pk/73kW	4x75cm/4x30"	1000	1300
ROW-FIX 3600	100pk/73kW	4x90cm/4x36"	1000	1400
ROW-FIX 4500	140pk/103kW	6x75cm/6x30"	1000	2650
ROW-FIX 5800	140pk/103kW	6x90cm/6x36"	1000	2750
ROW-FIX 6000	170pk/125kW	8x75cm/8x30"	1000	2900
ROW-FIX 7720	170pk/125kW	8x90cm/8x36"	1000	3000

Illustrations, dimensions and weights may be altered without prior notice.